



Ventilation & heating

Air movement and oscillation are important to any building – and GET has the expertise to meet a variety of heating and ventilation needs. Our air movement products promise increased comfort and hygiene in the office or at home.

End users can expect quick and easy installation and neat designs that slot into the smallest spaces. There are also portable solutions that offer convenience and flexibility.

Finishes range from classic white to decorative chrome to match other fixtures and fittings. The full range extends across extractor fans, convector and oil filled heaters and hand dryers.

Check out the exciting new range of 4" slimline extractor fans included for the first time in this edition.

Extractor fans	138-140
100mm (4") slimline fan	139
100mm (4") fan	139
100mm (4") shower fan	139
150mm (6") fan	140
Accessories	140
Warm air	141
Hand dryers	142
Bathroom heater	142
Tubular heater	142
Portable heaters	143-144
Technical information	145-167



Extractor fans

For optimum air extraction, a fan should be effective, efficient and stylish. Our slimline 100mm extractor fan has been designed to provide an innovative approach that complements modern interior styling and fittings.

A large choice of mains, low voltage and humidistat options are also available in our standard 100mm extractor fan range, while for greater air extraction the 150mm option provides the perfect solution.

Features and benefits

Sizes include 100mm and 150mm variants

Ultra slimline model incorporates 12mm front projection in the following finishes:

- white moulded
- chrome effect

Models available with timers, pull cords, low voltage, humidistat options


Powerful air extraction across all ranges

Models are available for either wall or ceiling mounting

Shower fan with light available for mounting directly in shower cubicles

All extractor fans designed for quick and easy installation

Wide range of ducting and accessories ensure optimum installation

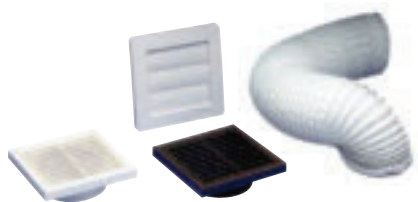

A full range of vents and ducting is now available for use in kitchens, bathrooms and commercial installations.



Designed for ease of installation



Complementary finishes for Flat Plate & Slimline extractor fan harmonisation

Extractor fans

100mm (4") fans

100mm (4") slimline fans



GFANC4SL

Code	Description	Qty
GFANC4SL	Standard	1
GFANC4SLT	With timer	1
GFANC4SLC	Chrome effect	1
GFANC4SLTC	Chrome effect with timer	1

- 12mm Ultra Slim wall projection
- Extraction capacity – 93m³/hr
- Suitable for wall or ceiling mounting
- White or chrome finishes



GFANC4SLC

Standard (4") extractor fans



GFAN4P

Code	Description	Qty
GFAN4	Standard	1
GFAN4P	Pull cord	1
GFAN4T	Timer	1
GFAN4H	Humidistat control	1

- Extraction capacity 93m³/hr
- Suitable for wall or ceiling mounting

12V SELV (safe extra low voltage)



GFAN412

Code	Description	Qty
GFAN412	Standard incl. transformer	1
GFAN412T	Timer incl. transformer	1

- Suitable for wall or ceiling mounting
- Extraction capacity – 93m³/hr

Inline shower fan kit



GFANIL

Code	Description	Qty
GFANIL	100mm (4") Inline shower fan kit	1
GFANILT	100mm (4") Inline shower fan kit with timer	1

- Suitable for loft installation
- Extraction capacity – 93m³/hr

Inline 12V SELV shower fan kit & light (safe extra low voltage)



GFAN4SWRT

Code	Description	Qty
GFAN4SWRT	Shower fan with 20W light and timer	1

- Kit contains fan, flexible PVC hose, grilles and fixings
- Suitable for ceiling mounting only
- Extraction capacity – 93m³/hr

Lamp: MR16 20W

Extractor fans

150mm (6") fans & accessories

150mm (6") extractor fan



GFAN6

Code	Description	Qty
GFAN6	Standard	1
GFAN6P	Pull cord override	1
GFAN6T	Timer	1

- Extraction capacity 250m³/hr
- Suitable for wall or ceiling mounting

150mm (6") extractor fan Solenoid




GFAN6HS

Code	Description	Qty
GFAN6S	Solenoid	1
GFAN6TS	Timer and solenoid	1
GFAN6HS	Humidistat with pull cord, timer and solenoid	1

- Extraction capacity 250m³/hr
- Suitable for wall mounting

100mm (4") ducting & accessories



Code	Description	Qty
GDUCT4/3M	3m flexible PVC hose	1
GDUCT4/6M	6m flexible PVC hose	1
GDUCT4/10M	10m flexible PVC hose	1
GDUCT4/15M	15m flexible PVC hose	1
GGRIL4W/B	gravity wall grille (white or brown)	1
GFGRIL4W/B	fixed grille (white or brown)	1
GFFGRIL4W/B	fixed wall grille with fly screen (white or brown)	1
GGRIL4CH	100mm (4") chrome effect fixed grille	1

150mm (6") ducting accessories



Code	Description	Qty
GDUCT6/3M	3m flexible PVC hose	1
GGRIL6W/B	gravity wall grille (white or brown)	1
GFGRIL6W/B	150mm (6") fixed grille (white or brown)	1

A full range of vents and ducting is now available for use in kitchens, bathrooms and commercial installations.

Contact GET sales office 01707 601 601


Fan isolator



GU1013

For fully colour matched isolators see wiring accessories section



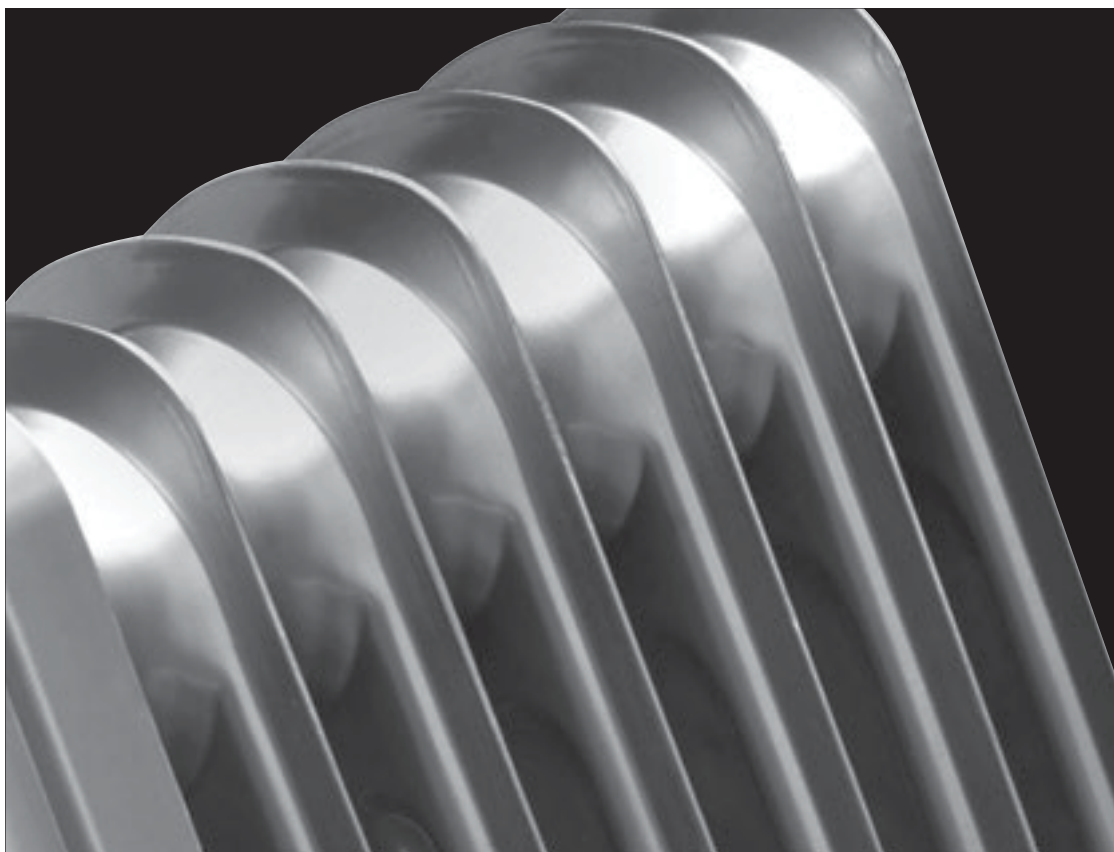

Warm air Fixed and portable heaters

GET's range of fixed and portable heaters offer amazing choice and unbeatable value for money. Innovative technical features are included within the specification to promote efficient product performance and style.

Our range extends across hand dryers, bathroom heaters, oil filled radiators, fan heaters and convector heaters.

Features and benefits

Bathroom downflow heater provides 2 heat setting adjustments for greater comfort

Oil filled radiators provide flexible portable heating with a choice of ratings from 700W to 2.5kW

Fan heaters provide an additional solution to space heating

Slimline glass heaters offer stylish design with touch control heating

Convector heaters provide a secure easy to fit wall mounting option

Halogen heaters provide radiant electric heat with high efficiency

Warm air Hand dryers and fixed heaters

Heavy duty hand dryers



HDAC



HDM

Code	Description	Qty
HDM	Heavy duty hand dryer with manual operation	1
HDA	Heavy duty hand dryer with automatic operation	1
HDAC	Heavy duty hand dryer with automatic operation - chrome finish	1

Dimensions: 300mm (L) x 200mm (W) x 165mm (H)

- Adjustable running time 30 or 60 second
- 20.5m/sec air velocity
- 2.17kW loading
- 3 year guarantee
- Thermal safety cut-out
- Drip proof
- Weight – 6kg
- Strong die cast aluminium housing
- Complies with all relevant EMC and low voltage directive
- Approved & certified to safety standard EN 60335-2-23

Downflow bathroom heater



G2BFHP

Code	Description	Qty
G2BFHP	2kW heater	1

Dimensions: 230mm (L) x 230mm (W) x 135mm (D)

- Pullcord adjusts heat settings - 1200W & 2kW
- Weight - 1.2kg

Tubular heater



G2TH80



Code	Description	Qty
G2TH80	80W tubular heater.	1
G2TH135	135W tubular heater	1
G2TH180	180W tubular heater	1
Tubular Heater Protective Guards		
G2TH80PG	to fit 80W heater	1
G2TH135PG	to fit 135W heater	1
G2TH180PG	to fit 180W heater	1

Ideal for workshops, garages, green houses.

Dimensions: Length 600mm
Dimensions: Length 915mm
Dimensions: Length 1225mm

- Wall mountable
- Supplied with 1.5m flex
- Supplied with wall mounting brackets.
- IPx4
- Low power consumption

Warm air Portable heaters

Oil-filled radiators



G20FH5

Code	Description	Qty
G20FH5	700W mini - silver	1
G20FH5W	700W mini - white	1
G20FH7	1.5kW 7 fin - 3 heat settings (600W, 900W and 1.5kW)	1
G20FH9	2kW 9 fin - 3 heat settings (800W, 1.2kW and 2kW)	1
G20FH9T	2kW 9 fin with timer - 3 heat settings (800W, 1.2kW and 2kW)	1
G20FH11	2.5kW 11 fin - 3 heat settings (1.0kW, 1.5kW and 2.5kW)	1

- Illuminated control switches
- Fully adjustable thermostat for effective heat control
- Frost guard protection ❄️
- Omni-directional castors for ease of use (except on 700W models)
- Integral cable and plug storage facility
- Fitted with approved flex

Convactor heaters



G2CH

Code	Description	Qty
G2CH	2kW with wall mounting options	1
G2CHT	2kW with timer and wall mounting options	1
G2TCH	2kW with turbo and wall mounting options	1
G2TCHT	2kW with turbo, timer and wall mounting options	1

- All convectors have 3 heat settings – 750W, 1.2kW and 2kW
 - Illuminated control switches (optional boost switch on turbo model)
 - Fully adjustable thermostat for effective heat control
 - Frost guard protection ❄️
 - Secure wall mounted option (included brackets and fixings)
 - Fitted with approved flex
- Dimensions:
- free standing 425(H) x 585(W) x 200mm(D)
 - wall mount 425(H) x 585(W) x 140mm(D)

Portable fan heaters



GFHU2

Code	Description	Qty
GFHU2	2kW upright fan with thermostat - 2 heat settings (1kW and 2kW)	1
G2FHT2	2kW fan with thermostat - 2 heat settings (1kW and 2kW)	1
GFHT24	2.4kW fan with thermostat - 2 heat settings (1kW and 2.4kW)	1

- Resettable thermal cut-out
- Fitted with approved flex
- Frost guard protection ❄️



GFHUF2

Code	Description	Qty
GFHUF2	2kW upright/flat fan - 2 heat settings (1kW and 2kW)	1

- Resettable thermal cut-out
- Fitted with approved flex

Warm air

Portable & glass panel heaters

Halogen heaters



G3HAL2

Code	Description	Qty
G2HAL	1.2kW - 3 heat settings (400W, 800W and 1.2kW oscillating).	1
G3HAL2	800W - 2 heat settings	1

- Radiant electric heat, high efficiency
- Safety tip-over switch, over current protection and safety thermal fuse
- Recessed handle, portable and easy to carry
- Conforms to all relevant safety standards
- For domestic use only

Glass panel heaters



G2PHET350B



Code	Description	Qty
G2PHET350B	400W heater with timer - black glass	1
G2PHET350BS	400W heater with timer - black glass/steel frame	1

- Dimensions:
650mm(W) x 450mm(H) x 35mm(D)
- 400W
 - Slimline
 - Touch screen control
 - Electronic timer
 - Convection style heater
 - Thermal cut out
 - 6kg
 - 35mm profile when wall mounted